

HAREL FT10

For KAREL MS series PABX Systems

2 LINE DISPLAY

FEATURE PHONE



For KAREL DS series PABX systems

HAREL FT20

QUICK REFERENCE GUIDE

You can find the basic necessary information about your feature phone in this guide. To make use of all the facilities of your telephone set and PABX, you should absolutely read the Installation, Programming and User's Guide that includes the complete set of information. For further information about documents and product: www.karel.com.tr e-mail: info@karel.com.tr

ATTENTION: There are some differences between FT10 and FT20 models that result from PABX features. If an item has **FT20** sign, related option is available only for that specific model.

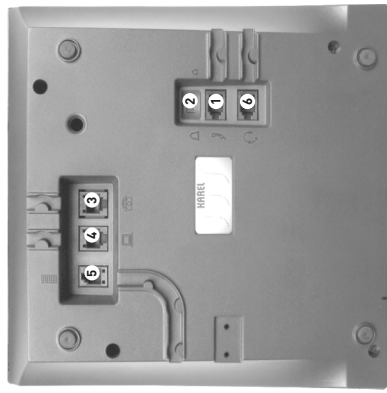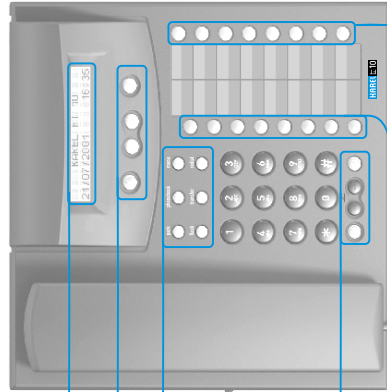

- 1 HANDSET CONNECTION:** Phone handset is connected
- 2 RING VOLUME SETTING:** Ring volume can be set to two levels: High or low
- 3 LINE CONNECTION:** The extension line from PABX should be connected
- 4 STANDBY CONNECTION:** Reserved for future use.
- 5 DSS CONNECTION:** Direct Station Select module can be connected

6 HEADSET CONNECTION:

- It is used to connect the KAREL headset to the phone.
- To receive a call through the headset, press **HF**. To terminate the call, press the **HF** key again.
- When the telephone is idle, pressing the **HF** key turns on the LED of "handsfree" key (HF is not activated). Thus, conversation through the headset starts.

DISPLAY: 2 x 20-character menu driven LCD gives practical information about the current status of your phone. Active features of the phone and the PABX, information on incoming calls, call control options, data received from the network and phone setting options are displayed on this LCD.

MULTI PURPOSE MENU KEYS:


- Traces menu options that are displayed on the screen and scrolls through the sub-menus
- Makes entries into the phone book and answers calls with the headset.
- Selects the option displayed on the screen or enters to the sub-menus.

SPECIAL FUNCTION KEYS:

- Park:** Parks the ongoing calls and retrieves them in the order they are parked.
- Phonebook:** Accesses the memory with a capacity of 60 numbers.
- Menu:** Enters to the menus for programming.
- Flash:** Makes hook-flash to hold a call and retrieves the call when pressed again.
- Transfer:** Transfers the call that is on hold to the extension which is on the line.
- Redial:** Dials the last dialed external number automatically.


VOICE CONTROL KEYS:

- Handsfree (HF): Without lifting handset**
 - Activates HF mode in idle state.
 - Switches to HF mode during a call.
 - If pressed twice during a call, switches to the monitor mode (the voice comes from handset and speaker, goes only through the handset)
 - Terminates HF mode, if HF mode is active.
 - Mute:** If pressed during calls, no voice is transmitted and the LED turns on. If pressed again conversation goes on normally and the LED turns off.

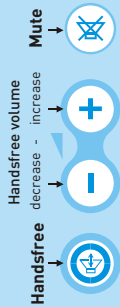

SPEED DIAL KEYS:

- The features that are commonly used can be assigned to LED monitored keys for the purpose of easy access.
- Each of the 16 keys can be programmed for two different functions, pressing the key shortly, accesses the primary function and pressing longer runs the secondary function.
- Extension, line, common & private pool numbers and functions can be assigned to these keys.
- With the auto setting feature, all the speed dial keys can be programmed at once, easily.
- Two-colour LEDs give information about the primary function of the key; Continuous red: Busy function programming; Programming is on). Blinking red: Ringing. Green/red blinking: Left off-hook / out of services.

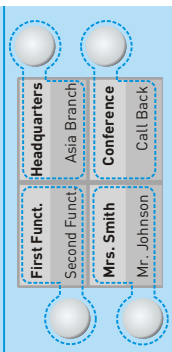

- There are two-line labels next to each speed dial key to write down the two facilities programmed on this key.
- To reach the paper label, remove the transparent cover using a thin edged object from the upper right corner. To place the cover back, squeeze from the sides and release. You may download and print the editable templates of label sheets from www.karel.com.tr

FT20 option: 1


FT20 option: 2

FT10 spare FT20

FT10 option: MS 38S

Ext. 1110	Ext. 1118	Phone Lock	Pager		Ext. 11	Line 1	
Ext. 1126	Ext. 1134	Ext. 1126	Ext. 1134		Do not Disturb	Call Pick Up	
Ext. 1111	Ext. 1119	Auto-Dial	Conference		Ext. 12	Line 2	
Ext. 1127	Ext. 1135	Ext. 1127	Ext. 1135		Follow Me	Conference	
Ext. 1112	Ext. 1120	Reminder	Night Mode		Ext. 13	Line 3	
Ext. 1128	Ext. 1136	Ext. 1128	Ext. 1136		Line Park	Call Back	
Ext. 1113	Ext. 1121	Do not Disturb	Ext. 1121		Ext. 14	Line 4	
Ext. 1129	Ext. 1137	Ext. 1129	Ext. 1137		Parallel operator	Paging	
Ext. 1114	Ext. 1122	Follow Me	Ext. 1122		Ext. 15	Phone Lock	
Ext. 1130	Ext. 1138	Ext. 1130	Ext. 1138		ACD	Door Opener	
Ext. 1115	Ext. 1123	Line Park	Ext. 1123		Ext. 16	Message Listen	
Ext. 1131	Ext. 1139	Ext. 1131	Ext. 1139		Mute	Door Phone	
Ext. 1116	Ext. 1124	Call Pick Up	Ext. 1124		Ext. 17	Auto-Dial	
Ext. 1132	Ext. 1140	Ext. 1132	Ext. 1140		Night Mode	Hook-Flash	
Ext. 1117	Ext. 1125	Call Back	Ext. 1125		Ext. 18	Reminder	
Ext. 1133	Ext. 1141	Ext. 1133	Ext. 1141		Background music	Pager	
FT20 OPTION 1				FT20 OPTION 2			
				FT10 OPTION MS38S			

BASIC FEATURES OF YOUR TELEPHONE:

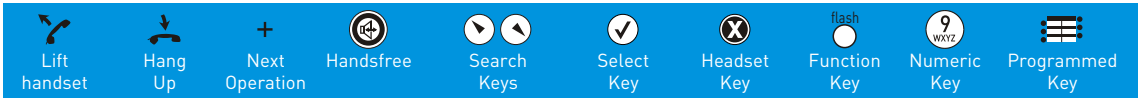

TO MAKE A CALL:	WITH HANDSET:	HANDSFREE:
INTERNAL :	+ EXTENSION NUMBER	+ EXTENSION NUMBER
EXTERNAL:	+ + EXTENSION NUMBER	+ + EXTENSION NUMBER
FROM POOL:	+ (PROGRAMMED KEY)	(PROGRAMMED KEY)

TO ANSWER A CALL:	WITH HANDSET:	HANDSFREE	WITH HEADSET
EXTENSION OR LINE:			

TO END A CALL:	WITH HANDSET:	HANDSFREE	WITH HEADSET
EXTENSION OR LINE:			

TO TRANSFER A CALL:
 DURING CONVERSATION: + EXTENSION NUMBER + +
 OR HOLD → + EXTENSION NUMBER + TRANSFER →

TO PARK A CALL:
 DURING CONVERSATION: + OR PARK →
 TO RETRIEVE: (RETRIEVES THE LAST PARKED LINE) IF THERE ARE MORE THAN ONE LINE; → RETRIEVE →

MENU STRUCTURE:
PROGRAMMING : Press key, browse through menu items by keys. Press key to call a sub-menu item. The and signs on the screen show that there are other options available. Press key to return to the previous menu or press key to call the sub-menu. Press key to reach the next menu item.
Example: In order to change the Greeting Message, press key and then click key till "PHONE BOOK" menu is seen on the screen. Press to select this and use key until "GREETING MESSAGE" is displayed. Finally press to type your new greeting message.

The table below illustrates the main menu items and "key settings" sub-menu details. Upper line shows the main menu options, and related sub-menu options are listed underneath. If an item has sign, this option is available only for that model. Depending on the telephone model and PABX configuration, menu titles can be seen in different orders.

CALL OPTIONS FOLLOW ME PAGER AUTO DIAL PAGING MISSED CALL	PHONE SETTINGS KEY SETTINGS DO NOT DISTURB REMINDER BACKGROUND MUSIC EPROM VERSION LAZY MODE LANGUAGE PRIVATE POOL ENTRY METER PULSE PRICE SIGNAL BEEP OPTION FOLLOW ME	PHONE SECURITY PASSWORD PHONE LOCK	SYSTEM SETTINGS <small>(only available for operators)</small> TIME SETTINGS DATE SETTINGS NIGHT MODE ACD PARALLEL OPERATOR COMMON POOL ENTRY	PHONE BOOK ADD EDIT CLEAR GREETING MESSAGE FIND	MESSAGE MENU ABSENT MESSAGE MESSAGE LISTEN
--------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------	--------------------------------------------------

PROGRAMMING THE SPEED DIAL BUTTONS: **PHONE SETTINGS > KEY SETTINGS**

EXTENSION (PRESS KEY) EXT. NO: A	LINE (PRESS KEY) LINE NO: B	PRIVATE POOL (PRESS KEY) REGISTER NO: C	COMMON POOL (PRESS KEY) REGISTER NO: E	FEATURE (PRESS KEY) (OPTIONS) F	FEATURE CODE (PRESS KEY) NO: ... G	AUTO SETTING (OPTIONS) H CLEAR?
-----------------------------------------------	------------------------------------------	------------------------------------------------------	-----------------------------------------------------	----------------------------------------------	-------------------------------------------------	----------------------------------------------

- A** Extension number (for , three digits, for , four digits)
- B** Line number (for this may be 8 digits long)
- C** For between 01-20, for between 1-9 register numbers.
- D** External number or function code for FT10. For function code press the key, and then enter the function code. (**G**)
- E** Common pool register numbers. The operator can enter the phone numbers into the common pool.
- F** Options: AUTO DIAL>FOLLOW ME KEY> CALL BACK KEY> DO NOT DISTURB KEY> PHONE LOCK KEY> CONFERENCE KEY> PAGER KEY> NIGHT MODE KEY
- G** Any function code desired. Eg. For background music 743
- H** According to the PABX and phone model, there are different programming options. You can select the suitable one for your requirement among the options listed on the next page and can program these keys automatically at once. Then, you can also make any programming on any key. You may cut the relevant label and use it on your phone.

FT 2 Line • Quick Reference Guide • REV AAB ENG • HKGT00215 • 03/03

option: 1		option: 2		option: 3		option: 4	
Ext. 111	Ext. 119 Line 1	Line 9	Common Pool 00	cp 08	Phone Lock	ACD	
Ext. 127	Ext. 135 Line 17	Line 25	cp 16	cp 24	Door Opener	Ext. 115	
Ext. 112	Ext. 120 Line 2	Line 10	cp 01	cp 09	Message List.	Mute	
Ext. 128	Ext. 136 Line 18	Line 26	cp 17	cp 25	Door Phone	Ext. 116	
Ext. 113	Ext. 121 Line 3	Line 11	cp 02	cp 10	Auto-Dial	Night Mode	
Ext. 129	Ext. 137 Line 19	Line 27	cp 18	cp 26	Hook-Flash	Ext. 117	
Ext. 114	Ext. 122 Line 4	Line 12	cp 03	cp 11	Reminder	Music	
Ext. 130	Ext. 138 Line 20	Line 28	cp 19	cp 27	Pager	Ext. 118	
Ext. 115	Ext. 123 Line 5	Line 13	cp 04	cp 12	Do Not Disturb	Call Pick Up	
Ext. 131	Ext. 139 Line 21	Ext.1 111	cp 20	cp 28	Ext. 111	Ext. 119	
Ext. 116	Ext. 124 Line 6	Line 14	cp 05	cp 13	Follow Me	Conference	
Ext. 132	Ext. 140 Line 22	Ext.2 112	cp 21	cp 29	Ext.112	Ext. 120	
Ext. 117	Ext. 125 Line 7	Line 15	cp 06	cp 14	Line Park	Call Back	
Ext. 133	Ext. 141 Line 23	Ext.3 113	cp 22	cp 30	Ext. 113	Ext. 121	
Ext. 118	Ext. 126 Line 8	Line 16	cp 07	cp 15	Parallel Operator	Paging	
Ext. 134	Ext. 142 Line 24	Ext.4 114	cp 23	cp 31	Ext. 114	Ext. 122	
	FT10 OPTION 1	FT10 OPTION 2		FT10 OPTION 3: Common Pool.		FT10 OPTION 4	